


## PŁLD CHAIN FEEDER FOR FOR NARROW AND LONG BOARDS

v1

2015/02/16

PŁLD chain feeder is intended for a single delivery of boards placed in the dispenser.

The fundamental unit of the transporter is triplex chain with the driver, driven with the aid of motorised speed reducer by chain transmission. Feed rate of the conveyor is in the range of 25-35 m/min, and it is infinitely adjustable. The conveyor is intended for the elements with a maximum length of 6000mm, range of 50-240mm width and thickness from 20 to 50mm.

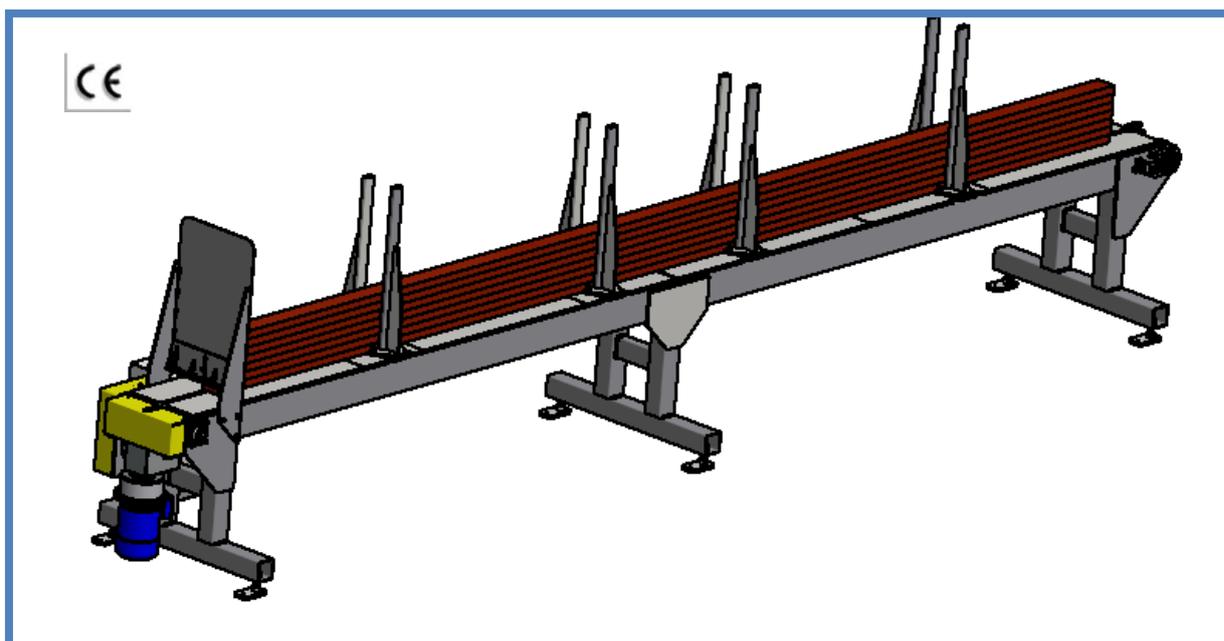

### TECHNICAL-OPERATIONAL DATA:

Length	mm	<b>6800</b>
Length of working top	mm	<b>6500</b>
Width of working top	mm	<b>400</b>
Working height	mm	<b>850</b>
Feed rate	m/min	<b>25-35</b>
Noise level	dBa	<b>approx.80</b>
Installed power	KW	<b>2.2</b>
Electrical power supply	V AC	<b>3/N/PE, 400V 50Hz</b>
Control voltage	V DC	<b>24</b>
Unit weight	Kg	<b>~ 760</b>